


ACE-R4130AP


300 W ATX Mini Redundant Power Supply

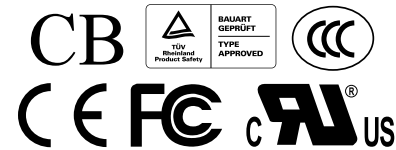


Features

1. RoHS compliant
2. High efficiency and reliability
3. Low noise and ripple
4. Meets ATX Specification v2.2, with 20+4-pin ATX power and SATA connectors
5. Overvoltage and overcurrent protection
6. Meets multiple safety standards and is EMC certified

Dimensions

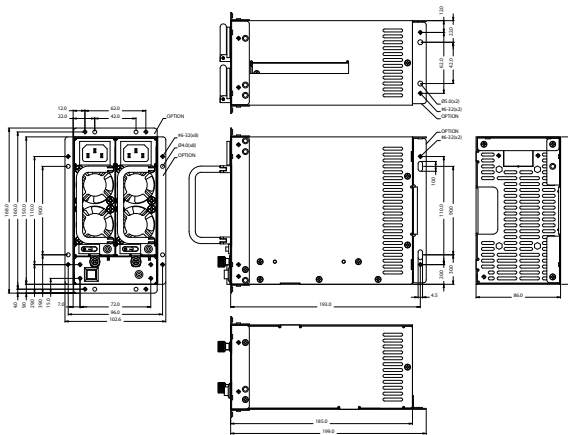


PICMG1.0 Form Factor Backplane

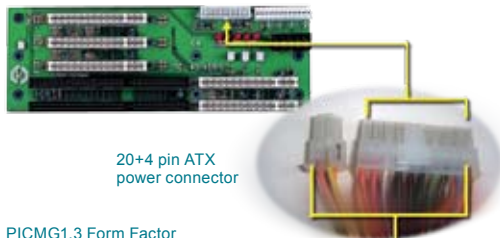

20+4 pin ATX power connector

PICMG1.3 Form Factor Backplane PE-10S/6S



Specifications

Input	Voltage	90 ~ 264 VAC Full Range				
	Frequency	47 Hz ~ 63 Hz				
	Input Current	6 A(RMS)@110 VAC 3 A(RMS)@220 VAC				
	Inrush Current	60 A Max for 110 VAC 80 A Max for 220 VAC				
Output	Voltage	Min. load	Max. load	Load Reg.	Line Reg.	Ripple & Noise
	+5 V	3 A	25 A	±5 %	±1 %	50mV P-P
	+12 V	2 A	16 A	±7 %	±1 %	120mV P-P
	-5 V	0 A	0.5 A	±10 %	±1 %	150mV P-P
	-12 V	0 A	0.5 A	±10 %	±1 %	150mV P-P
	+3.3 V	1 A	18 A	±5 %	±1 %	50mV P-P
	+5 Vsb	0.1 A	2 A	±5 %	±1 %	60mV P-P
	*Total current of +5 V and +3.3 V not exceed 35 A					
	*Total current of +5 V, +3.3 V and +12 V not exceed 282 W					
	Overvoltage protection	+12 V : 13 V ~ 14.6 V +5 V : 5.7 V ~ 6.6 V +3.3 V : 3.9 V ~ 4.3 V				
General Specifications	Short Circuit protection	Shut down and latch off				
	Watt	300 W				
	PFC	Active				
	Hold-up time	16 ms Min.				
	Efficiency	65 % Min.				
	MTBF	160,000 hours				
	Temperature	Operating : 0 °C~50 °C Storage : -20 °C~ 80 °C				
	Dimensions	185 x 150 x 86 (mm) 7.28 x 5.91 x 3.39 (inch)				
	Output connector	20+4PIN ATX x1, 4PIN 12V CPU x1, HDD/ CDROM x8, FDD x2, SATA x2, Buzzer Reset x1, T.T.L signal x1, LED power x1				

Ordering Information

Part No.	Description
ACE-R4130AP-RS	300 W Mini Redundant ATX Power Supply, with PFC
ACE-R4130AP1-RS	300 W AC-DC ATX Redundant module, for ACE-R4130AP, with PFC